

## Cabluri, cu un singur fir

**S7260/ ... (GS 260- ...)**

**S7261/ ... (GS 260 SL- ...)**

- Izolatie cu fibra de sticla
- Conductor nichelina, multistrat
- Temperatura max.: 350 °C
- Conductor impamantare (verde / galben)

Specificați lungimea (L) dorita in formularul de comanda.

## Cable, single-core

- Glass fibre insulation
- Nickel conductor, multistrand
- Temperature max.: 350 °C
- Earth conductor (green / yellow)

Please attach the required length (L) to the order number.



A [mm <sup>2</sup> ]	Nr. / No.
0,75	S7260/ 07 x L [m]
1,5	15 x L [m]
2,5	25 x L [m]

A [mm <sup>2</sup> ]	Nr. / No.
0,75	S7261/ 07 x L [m]
1,5	15 x L [m]
2,5	25 x L [m]

## Cabluri, cu mai multe fire

**S7262/ ... (TP 260- ...)**


- Cu impletitura de otel
- Conductoare cu izolatie de fibra de sticla
- Izolatie PTFE
- Cu conductor impamantare

Specificați lungimea (L) dorita in formularul de comanda.

## Cable, multi-core

- With steel braiding
- Single cable with glass fibre insulation
- PTFE-insulated
- With earth conductor

Please attach the required length (L) to the order number.

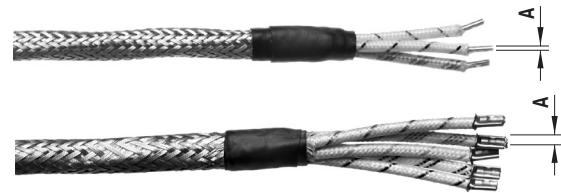

A [mm <sup>2</sup> ]	Conductor Conductor	Temperatura max. Temperature max.	Nr. / No.
3 x 0,75	Nichelina / Nickel	350 °C	S7262/ 307 x L [m]
3 x 1,5	Cupru, placat cu nichelina/ Copper, nickel coated	260 °C	315 x L [m]
3 x 2,5			325 x L [m]
5 x 1,5			515 x L [m]
5 x 2,5			525 x L [m]

**Cabluri,  
cu mai multe fire, izolare siliconica****S7263/ ... (SAB- ...)**

- Izolare siliconica
- Temperatura max. 180 °C
- Conductor cupru multistrat, placat cu nichelina
- Cu conductor impamantare

Specificați lungimea (L) dorita in formularul de comanda.

**Cable,  
multi-core, silicon insulated**

- Silicon insulated
- Temperature max. 180 °C
- Multistrand copper conductor, nickel coated
- With earth conductor

Please attach the required length (L) to the order number.



A [mm <sup>2</sup> ]	Nr. / No.
3 x 1,5	S7263/ 315 x L [m]
3 x 2,5	S7263/ 325 x L [m]