

## Rezistenta spiralata, 4,6 x 8,6 mm, dreptunghiular

LA CEREREA CLIENTULUI

S5138/ . . . (WRP 35)

### Specificatii tehnice:

Material: CrNi-Otel  
Lungime totala: max. 3000 mm (in stare dreapta)  
Lungime incalzita: 250 - 2890 mm (in stare dreapta)  
Zona neincalzita: 65 mm  
Tensiune: 230 V  
Putere: 300 - 1000 W

- disponibil cu sau fara termocuplu (Fe-CuNi)

### Modele spirale

- Lungime de la 40 - 200 mm
- Diametru interior: 20 - 50 mm

## Coil Heater, 4,6 x 8,6 mm, rectangular

CUSTOM MADE


### Technical specifications:

Material: CrNi-Steel  
Total length: max. 3000 mm (straight)  
Heated length: 250 - 2890 mm (straight)  
Unheated zone: 65 mm  
Voltage: 230 V  
Wattage: 300 - 1000 W

- available with or without thermocouple (Fe-CuNi)

### Coiled design:

- Length 40 - 200 mm
- Internal diameter: 20 - 50 mm

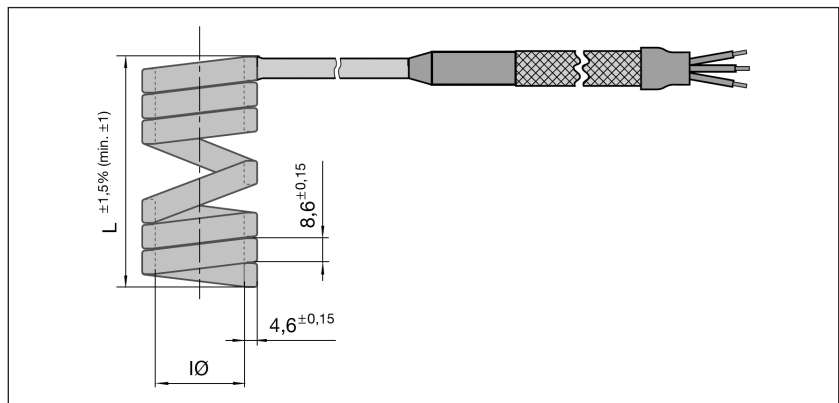

### Puteri si dimensiuni disponibile in stoc:

Ø [mm]:	40	60	80	100	120	140	160
20	300	450	550	550	800	800	800
22	300	450	550	800	800	800	800
24	300	550	550	800	800	800	1000
26	300	550	550	800	1000	1000	1000
28	450	550	550	800	1000	1000	1000
30	450	550	550	800	1000	1000	1000
32	450	550	800	1000	1000	1000	
34	450	800	800	1000	1000		
36	450	800	800	1000			
38	550	800	800	1000			
40	550	800	800	1000			
42	550	1000	1000				
44	550	1000	1000				
46	550	1000	1000				
48	550	1000	1000				
50 (2")	550	1000	1000				
52	550	1000	1000				
54	550						
56	800						
58	800						
60	800						

### Possible wattage and dimensions coiled out of stock heaters:

Ø [mm]:	40	60	80	L [mm]
62	300	800	1000	
64	300	800	1000	
66	300	800		
68	300	800		
70	300	800		
72	300	800		
74	300	800		
76	300	1000		
78	300	1000		
80	300	1000		
82	300	1000		
84	300	1000		
86	300	1000		
88	450	1000		
90	450	1000		
92	450	1000		
94	450	1000		
96	450	1000		
98	450	1000		
100	450	1000		



Rezistenta spiralata,  
4,6 x 8,6 mm, dreptunghiular

Coil Heater,  
4,6 x 8,6 mm, rectangular


S5138/ ... (WRP 35)



Tipul spiralei  
Type of coiling

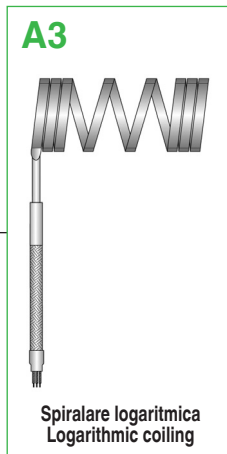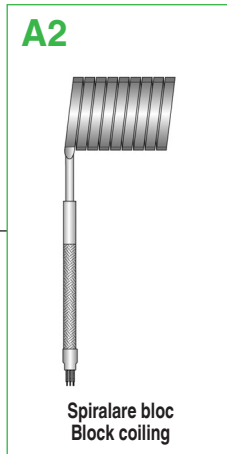

Teaca  
Jacket

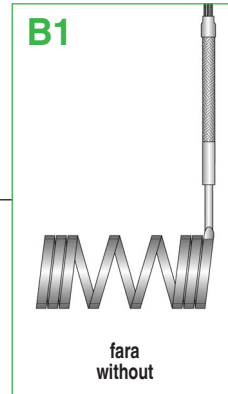


**Rezistenta spiralata**  
**4,6 x 8,6 mm, dreptunghiular**

**Coil Heater**  
**4,6 x 8,6 mm, rectangular**


Tipuri de iesiri  
Exit variations

**C1**




radial

**C2**



tangential

**C3**




axial

Tipuri de cabluri  
si optiuni de conectare

Lead types  
and connection options

**D9**



Fara capat, cu conductor de impamantare si manson metalic impletit (Tip NG, NM, ND)

Without head, with ground conductor and metal braided sleeve (Type NG, NM, ND)


**D10**



Cu capat si conductor de impamantare (Tip N)

With head and ground conductor (Type N)

**D11**



Cu capat, conductor de impamantare si manson GLS (Tip NG)

With head, ground conductor and GLS-sleeve (Type NG)


**D12**



Cu capat, conductor de impamantare si manson metalic flexibil, conductoare de nichelina cu izolatia de fibra de sticla (Tip NM)

With head, ground conductor and flexible metal sleeve, glass silk insulated nickel leads (Type NM)

**D13**



Cu capat, conductor de impamantare si manson metalic flexibil, conductoare de nichelina cu izolatia de fibra de sticla (Tip ND)

With head, ground conductor and metal braided sleeve, glass silk insulated nickel leads (Type ND)


**Rezistenta spiralata,  
4,6 x 8,6 mm, dreptunghiular**
**LA CEREREA CLIENTULUI**
**Coil Heater,  
4,6 x 8,6 mm, rectangular**
**CUSTOM MADE**

Formular comanda		Order form
Firma/Company _____		
Persoana contact/Contact _____		
Tel.: _____	Fax: _____	Data/Date: _____
<input type="checkbox"/> Comanda/Order	Nr./No.: _____	<input type="checkbox"/> Cerere oferta/Quotation

**Specificatii comanda:**
**n:** Cantitatea  
**Nr.:** S5138

**IØ:** Diametru interior-Ø (20 - 50 mm)  
**L:** Lungime spirala (20 - 200 mm)  
**A:** Tipul spiralei (3.28 A1-3)  
**B:** Teaca (3.28 B1-3)  
**C:** Tipuri de iesiri (3.29 C1-3)  
**D:** Optiuni de conectare (3.29 D9-13)  
**T:** cu termocuplu (1)  
 fara termocuplu (2)

**Order specifications:**
**n:** Quantity  
**No.:** S5138

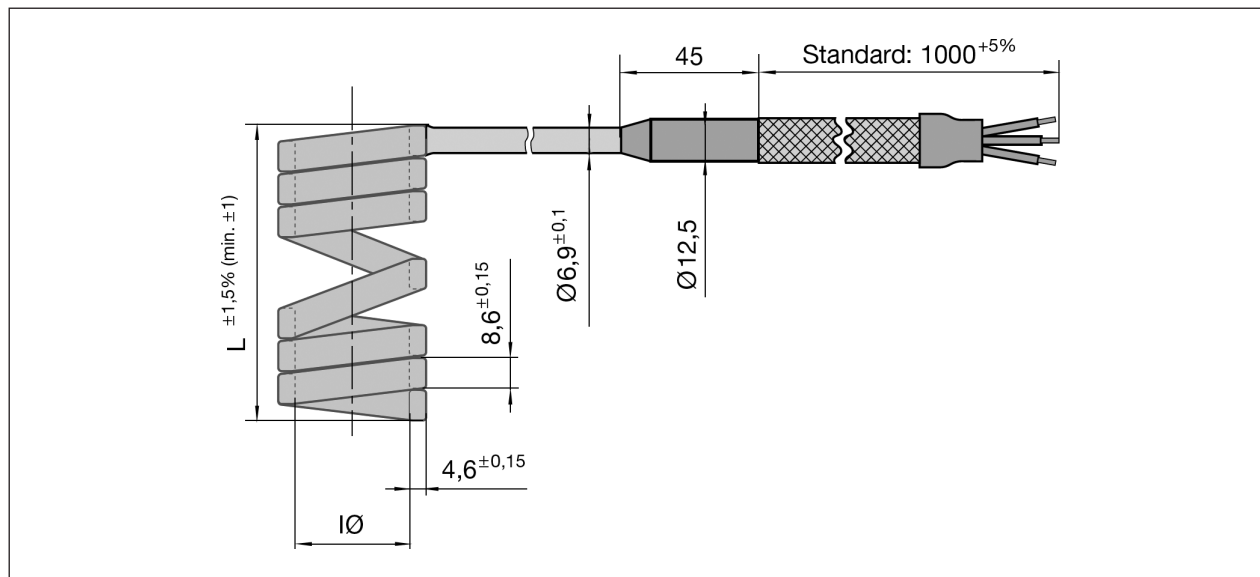**IØ:** Internal-Ø (20 - 50 mm)  
**L:** Coiled length (20 - 200 mm)  
**A:** Type of coiling (3.28 A1-3)  
**B:** Jacket (3.28 B1-3)  
**C:** Exit variations (3.29 C1-3)  
**D:** Connection options (3.29 D9-13)  
**T:** with thermocouple (1)  
 without thermocouple (2)


Alte dimensiuni pentru rezistentele spiralate se pot furniza la cerere.

Other designs of coil heaters can be supplied on request.

n	Nr. / No.	IØ [mm]	L [mm]	A	B	C	D	T
	S5138 /	X	X	X	X	X	X	X
	S5138 /	X	X	X	X	X	X	X
	S5138 /	X	X	X	X	X	X	X
	S5138 /	X	X	X	X	X	X	X
	S5138 /	X	X	X	X	X	X	X