

**Rezistente tubulare flexibile,
Ø (rotund)**

LA CEREREA CLIENTULUI

**Flexible Tubular Heater,
Ø (round)**

CUSTOM MADE


Formular comanda		Order form	
Firma/Company _____			
Persoana contact/Contact _____			
Tel.: _____	Fax: _____	Data/Date: _____	
<input type="checkbox"/> Comanda/Order	Nr./No.: _____	<input type="checkbox"/> Cerere oferta/Quotation	

Specificatii comanda:

- n:** Cantitatea
Nr.: S5155, Ø (rotund)
- A:** Sectiunea transversala a rezistentei tubulare (Ø6,5 / Ø8,5 mm)
L: Lungimea rezistentei tubulare (max. 2600 mm)
LU1: Lungime neincalzita (30 mm)
LU2: Lungime neincalzita (30 mm)
P: Puterea (max. 10 W/cm²)
U: Tensiunea de alimentare (max. 250 V)
B: Pin filetat M3/M4 (B1)
Conector plat 4,8/6,3 mm (B2)
Conductor sertizat la exterior (B3)
Conductor continuu (B4)
Conector ceramic (B5)

Order specifications:

- n:** Quantity
No.: S5155, Ø (round)
- A:** Cross-section tubular heater (Ø6,5 / Ø8,5 mm)
L: Length tubular heater (max. 2600 mm)
LU1: Unheated length (30 mm)
LU2: Unheated length (30 mm)
P: Power (max. 10 W/cm²)
U: Connection voltage (max. 250 V)
B: Thread pin M3/M4 (B1)
Flat plug 4,8/6,3 mm (B2)
Lead crimped on the outside (B3)
Continuous lead (B4)
Ceramic connector (B5)

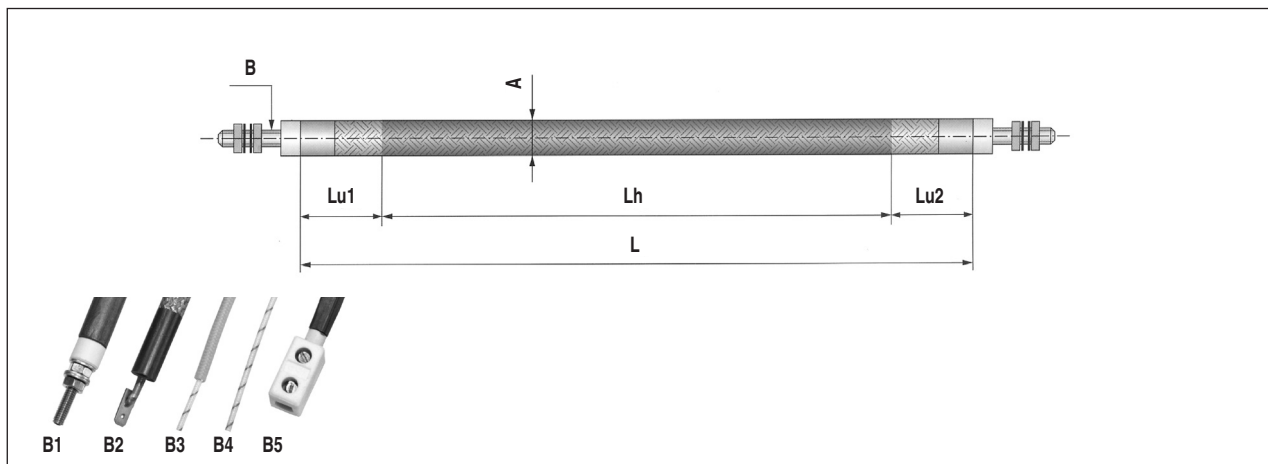

n	Nr. / No.	A [mm]	L [mm]	P [W]	U [V]	B
	S5155 /	X	X	X	X	X
	S5155 /	X	X	X	X	X
	S5155 /	X	X	X	X	X
	S5155 /	X	X	X	X	X
	S5155 /	X	X	X	X	X