

Elemente de ghidare

Guiding Unit

S1101/ ... (GLM ...)

PARTEA 1

- Material: 1.2363
- Duritate miez: 40 - 44 HRc
- Duritate suprafata: 65 HRc
- Strat: Melonit, nitrurat

PARTEA 2

- Material: 1.2344
- Duritate miez: 58 - 60 HRc
- Duritate suprafata: 80 HRc
- Strat: Nitrura de titan

Sunt incluse 6 suruburi (SHC 1 si 2) la livrare


PART 1

- Material: 1.2363
- Core hardness: 40 - 44 HRc
- Surface hardness: 65 HRc
- Coating: Melonite, nitrated

PART 2

- Material: 1.2344
- Core hardness: 58 - 60 HRc
- Surface hardness: 80 HRc
- Coating: Titanium nitride

6 socket head cap screws (SHC 1 and 2) are included

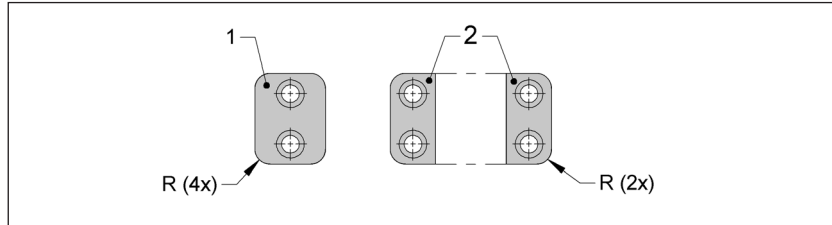


Pentru montarea in locatii, va rugam adaugati „R” la codul de comanda.

Exemplu: **S1101/ 50x90 - R**

For mounting into pockets, please attach “R” to the order number.

Example: **S1101/ 50x90 - R**

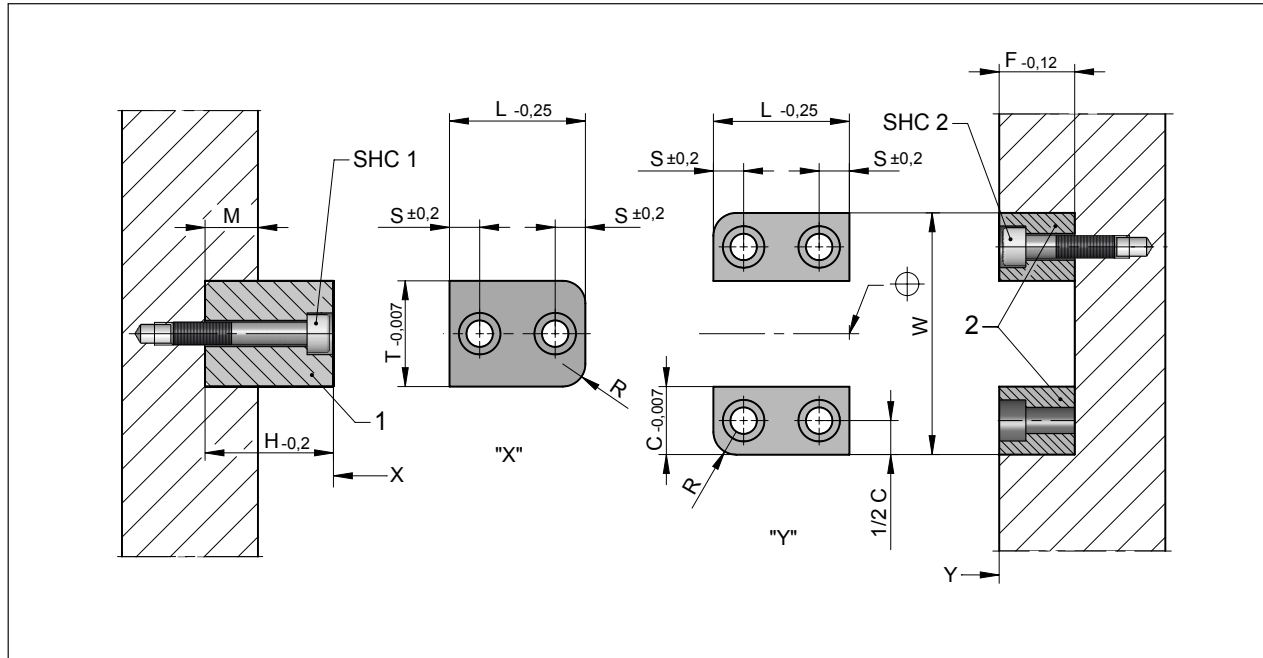

L	W	C	F	T	M	H	S	R*	SHC1	SHC2	Nr./No.
25	45	15	15	15	10	24	7	4	M4x25	M4x14	S1101/ 25x45
40	60	20	20	25	15	34	10	9	M5x35	M5x22	S1101/ 40x65
50	90	25	25	40	20	44	10	9	M6x45	M6x30	S1101/ 50x90
65	160	55	30	50	25	54	15	14	M8x60	M8x35	S1101/ 65x160

* = Raza locatie * = Pocket radius