

Inel date, Ani**Date Ring, Years****S2141/ ... (CCA- ...)**

Material: 1.4021 / 50 - 55 HRc

Insertia **S2146** trebuie comandat separat.

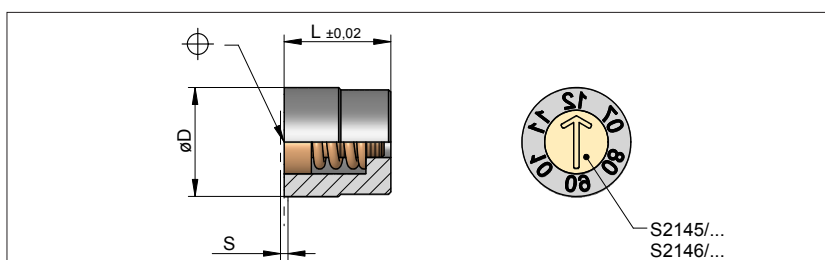
S = miscare axiala maxima

Pentru Dimensiuni de instalare vedeti pagina 6.08

Material: 1.4021 / 50 - 55 HRc

Insert **S2146** must be ordered separately.

S = max. axial movement

For Fitting dimensions ref. to page 6.08

| D | L | S | Nr. / No. |
|----|----|------|-----------|
| 5 | 8 | 0,20 | S2141/ 5 |
| 6 | | | 6 |
| 8 | | | 8 |
| 10 | 12 | 0,25 | 10 |
| 12 | | | 12 |
| 16 | 16 | 0,35 | 16 |
| 20 | | | 20 |

Inel date, Gol**Date Ring, Blank****S2142/ ... (CCN- ...)**

Material: 1.4021 / 50 - 55 HRc

Insertiile **S2145** si **S2146** trebuie comandate separat.

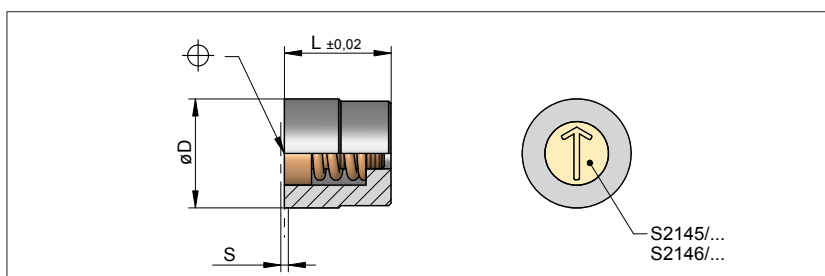
S = miscare axiala maxima

Pentru Dimensiuni de instalare vedeti pagina 6.08

Material: 1.4021 / 50 - 55 HRc

Inserts **S2145** and **S2146** must be ordered separately.

S = max. axial movement

For Fitting dimensions ref. to page 6.08

| D | L | S | Nr. / No. |
|----|----|------|-----------|
| 5 | 8 | 0,20 | S2142/ 5 |
| 6 | | | 6 |
| 8 | | | 8 |
| 10 | 12 | 0,25 | 10 |
| 12 | | | 12 |
| 16 | 16 | 0,35 | 16 |
| 20 | | | 20 |